

Geomotion
AUSTRALIA

Datasheet C19

Horizontal Digital Incliner System



DESCRIPTION

The Horizontal Digital Incliner System is used to measure settlement and/or heave within a horizontal borehole. The system comprises a uniaxial probe, cable reel and a rugged Field PC supplied with 'In-Port' data presentation software.

The probe incorporates MEMS technology allowing highly accurate and repeatable readings, transferred via a digital signal. Bluetooth communication enables a cable free data transmitting system with no connectors to corrode or break.

The Kevlar cable consists of a cable marker system which, when used in conjunction with the cable gate, provides highly accurate and repeatable depth control.

With all these combined features, the Horizontal Digital Incliner System is a robust and highly accurate system that is light, compact and easy to operate in any site environment.

FEATURES

- ✓ No connectors between probe, cable reel and Field PC
- ✓ Probe is manufactured from 316 Stainless Steel
- ✓ Precision sprung wheel assemblies
- ✓ Bluetooth connection between cable reel and Field PC
- ✓ Accurate and precise measurements using MEMS sensors
- ✓ Repeatable depth control using metal markers and cable gate system
- ✓ Field PC allows easy interface with most office systems and applications
- ✓ Enhanced 'In-Port' software to use with Field PC for easy data capture

BENEFITS

- ✓ Eliminates water ingress and connection problems
- ✓ Digital signal allows interference-free data transmission
- ✓ Advanced electronics ensure long, trouble free use in a site environment
- ✓ Can take a days' worth of readings on a single battery charge
- ✓ Lightweight and easily portable

OPERATION

The inclinometer probe is inserted into the inclinometer casing and lowered to depth, ensuring the probe wheels are correctly aligned and slotted within the keyways of the casing. The probe is connected by a graduated cable to the cable reel.

Displacement readings are taken at regular intervals of 0.5m within the casing (the gauge length between the probe wheels). This is measured and controlled by metal markers crimped around the cable that pass through a notch in the cable gate, giving an exact position for each reading.

A key fob activates the saving of readings from

the MEMS sensors, which are transmitted to the Field PC from the cable reel via Bluetooth transmission and saved.


When you take all subsequent readings at identical depths the comparison of successive casing profiles indicates the depth, direction, magnitude and the rate of change of movement.

You can see the clearest indication of movement by plotting the change in displacement of the casing against depth using Geomotion Cloud Data Management Software.

Applications

Horizontal Inclinometer Systems can be used to provide settlement profiles and monitoring of heave.

- ✓ Dams
- ✓ Embankments
- ✓ Structures
- ✓ Landfill
- ✓ Storage Tanks

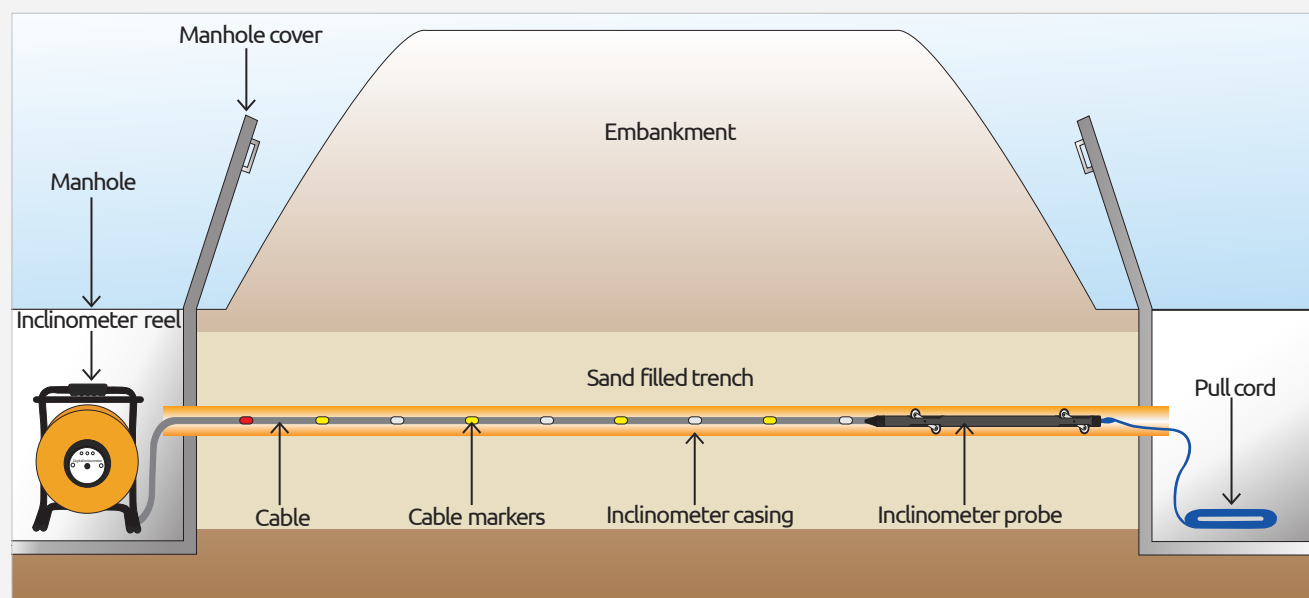

SPECIFICATIONS

Probe

Gauge length	500mm
Diameter	44mm
Calibrated range	±86.8mm/500mm (±10° arc)
Resolution	0.01mm
Sensor accuracy	±0.028% full scale (±0.05mm)
Operating temperature	-20 to +60°C
Repeatability	±0.006% full scale
System accuracy ¹	±2mm over 25m
Cable lengths	50m 100m 150m
Minimum casing internal diameter	57mm
Maximum casing internal diameter	85mm

Cable

Type	Kevlar re-enforced Polyurethane coated 4 core cable
Weight	50g per metre (approx.)
Cable marker	Stainless steel markers

Cable Reel

Cable	Standard
Dimensions	483mm x 385mm x 315mm
Battery life	12 hrs' continuous use

Weight (complete with probe)

50m	9kg
100m	11kg
150m	15kg

Field PC

Program footprint	128KB
Initial database size	200KB
Dimensions	165mm x 95mm x 45mm
Weight	520g
Ingress protection	IP67
Operating temperature	-30 to +60°C
Battery life	Up to 20 hours

Key Fob (remote handheld activator)

Dimensions	65mm x 35mm x 15mm
Weight	26g
Battery	1 x GP23A

¹Derived empirically from surveys that include systematic and random errors introduced by casing, probe and operator.
Achieved using Soil Instruments Easy Connect (EC) Casing installed within 3° of horizontal and operated in accordance with the user manual

ORDERING INFORMATION

Horizontal Digital Inclinometer

Range: $\pm 86.8\text{mm}/500\text{mm}$ (± 10 arc degree). Includes uniaxial probe, cable, cable reel & charger, cable gate, key fob, robust Field PC & charger, calibration certificate and manual. For use with up to 85mm OD casing

C19-1.3	50m cable length
C19-1.1	100m cable length
C19-1.2	150m cable length

In-Profile Inclinometer Data Management Package

C13-1-PRO	In-Profile package with 1 licence key
-----------	---------------------------------------

Replacement Battery Charger and Cables

C17-4.1	Universal inclinometer battery charger kit; includes UK mains cable – alternatives below
C17-4.2	Mains cable Australasia region plug; 1.9m long
C17-4.3	Mains cable, EU region plug; 1.9m long
C17-4.4	Mains cable, USA region plug; 1.9m long

Inclinometer Spares

C17-3.25	Spare battery for key fob
----------	---------------------------

Inclinometer Accessories

C11-2.2	Horizontal test probe complete with 100m steel cable & reel
C10-3.8	Probe reference frame

Installation Accessories

S17-4.5	Reference survey pin
E2-2.13	Protective cover; 2inch BSP threaded cap, 50mm ID, 500mm length
E2-2.14	Security cover; with bar and padlock, 50mm ID, 500mm length

Single Ended Installation Accessories

C11-2.3	Pulley box; used with draw cord E2-3.6 and profile tubing S17-4.1
S17-4.1	Profile tubing; supplied in 25m, 50m and 100m lengths
S17-4.2	End cap; to fit profile tube S17-4.1
S17-4.3	Profile tube repair coupling; for joining profile tubing S17-4.1 with a 50mm OD
E2-3.6	Pull cord; priced per 100m, 4mm OD

Manuals

MAN-155	Inclinometer Reference Frame
MAN-202	Digital Horizontal Inclinometer