



Datasheet C18

# Standard Inclinerometer Casing

## DESCRIPTION

The Standard Inclinerometer Casing is used in boreholes, embedded in fill material, cast into concrete or attached to structures.

The casing is jointed using standard or telescoping couplings and requires rivets to make the joints, and glue and tape to seal against water or grout ingress.

Standard Inclinerometer Casing is manufactured using ABS extrusion techniques, which enable precise keyways to be formed at 90° to each other.

This allows the accurate orientation of inclinometer probes or In-Place Inclinerometer Sensors (IPIs).

## FEATURES

- ✓ Deep, tight groove profile ensures accurate data
- ✓ Available in 70mm and 85mm outer diameters
- ✓ Manufactured from virgin ABS

## BENEFITS

- ✓ Cost effective
- ✓ Reduced wastage; casing can be cut and joined at any point along its length
- ✓ Can be used in conjunction with magnetic extensometers to form a combined inclinometer/extensometer

## OPERATION

Standard Inclinator Casing can be installed in boreholes, embedded into fill material, cast it into concrete or attached to structures. The casing moves with the ground, material or structure and provides inclination over an extended period of time.

Standard casing is available in 70mm and 85mm outside diameters and is suitable for most construction and civil engineering projects.

Inclinometer systems are used to measure lateral movement in the ground or in a structure. They are useful for determining the depth, direction, magnitude, and also rate of movement.

They can be used to ascertain the stability of retaining walls by measuring bending and rotation and can also reveal ground movement that could affect adjacent buildings. Inclinometer systems can also be used to detect movement in the downstream and upstream side of dams and define shear zones in the foundations of concrete faced dams.

Measurements of recorded movement are used to check that the deflections are within the design assumptions and continued monitoring can establish any long-term effects after works have finished.

### Typical applications include:

- ✓ Determining shear and slip zones
- ✓ Monitoring diaphragm or sheet pile walls
- ✓ Verifying design assumptions and finite element analysis
- ✓ Detecting and recording ground movement due to tunnelling operations
- ✓ Monitoring bending in piles
- ✓ Long term monitoring purposes
- ✓ Monitoring dams
- ✓ Monitoring retaining walls

## SPECIFICATIONS

Casing Specifications	70mm OD	85mm OD
Material	ABS (Acrylonitrile Butadiene Styrene)	
Groove spiral	< 0.3°/3m	
Collapse rating	1960kPa	1770kPa
Bend rating	3.07kN	2.65kN
Maximum temperature	80°C	80°C
Tensile strength	705kgF	700kgF
Torque	520Nm	481Nm

### Casing Dimensions


Length	3m	3m
Outside diameter	70mm	85mm
Inside diameter	62mm	77mm

### Standard Coupling Dimensions

Length	160mm	200mm
Outside diameter	77mm	91mm
Inside diameter	70mm	85mm

### Telescoping Coupling Dimensions

Length	400mm	380mm
Telescoping range	±75mm	±75mm
Outside diameter	77mm	91mm
Inside diameter	70mm	85mm

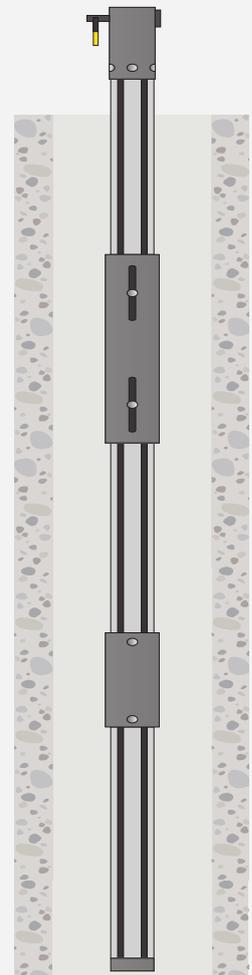

## SPECIFICATIONS

### Weights

Casing	2.66kg	3.18kg
End cap	70g	90g
Top cap	48g	64g
Lockable top cap	554g	654g
Telescoping coupling	400g	380g
Standard coupling	136g	236g

## ORDERING INFORMATION

### Standard Inclinometer Casing - 70mm Outer Diameter

C18-70.1	Inclinometer casing; 70mm outer diameter, 3metre length
C18-70.2	Coupling; 77mm outer diameter, 160mm length
C18-70.4	Bottom cap
C18-70.5	Telescoping coupling; 77mm outer diameter, 400mm length, 75mm range
C19-70.6	Lockable top cap assembly; includes 150mm length ABS tube, rivets, cap, bar and padlock
C9-1.4	Top cap

### Standard Inclinometer Casing - 85mm Outer Diameter

C18-85.1	Inclinometer casing; 85mm outer diameter, 3metre length
C18-85.2	Coupling; 91mm outer diameter, 200mm length
C18-85.3	Telescoping coupling; 91mm outer diameter, 380mm length, 75mm range
C18-85.7	Lockable top cap assembly; includes 200mm length ABS tube, rivets, cap, bar and padlock
C18-85.4	Bottom cap
C18-85.5	Top cap

### Inclinometer Head Works

C9-3.6	Security Cover; includes 4inch diameter 500mm length steel tube, cap, bar and padlock
C9-3.7	Lockable heavy duty stopcock cover

### Installation Equipment

C9-3.1	Riveting kit - 70mm outer diameter casing. Tool box includes tube support plate, hand drill, 3.3mm diameter drill, 300No 3.2mm diameter rivets, riveting tool, sealing tape, mastic and mastic tool. Sufficient for 100metres of casing
C9-3.2	Rivets for standard couplings; per 1000, 4 rivets required per standard coupling, 3.2mm diameter
C9-3.3	Rivets for telescoping couplings; per 1000, 4 rivets required per telescoping coupling, 4mm diameter
C9-3.10	Riveting tool
C9-3.11	Hand drill
C9-3.4	Sealing mastic; 1 tube per 20 couplings
C9-3.5	Mastic applicator
C9-3.8.1	Tube support plate; for 70mm outer diameter casing
C9-3.8.2	Tube support plate; for 85mm outer diameter casing
C9-3.12	Drill bit for rivets; for use with standard couplings C9-3.2. (3.3mm diameter)
C9-3.9	Drill bit for rivets; for use with telescoping couplings C9-3.3. (4.2mm diameter)
W6-4.3	Sealing tape; 1 roll per 6 couplings. 1 roll per 2 telescoping couplings

### Manuals

MAN-171	Bentonite Cement 'Grout Mix' Guide
MAN-187	Horizontal Riveted Inclinometer Casing Installation
MAN-201	Riveted Inclinometer Casing Installation